

# ETC® Service Note

## Congo™ jr MIDI, Phone and Macro Test




### Tools Needed:

- Remote Macro Test board
- Standard telephone and cable
- MIDI cable (5 Pin Din)
- DVI monitor, or VGA w/ DVI adapters
- USB Keyboard
- USB Mouse

### Procedure:

- Step 1: Connect all cables to the Congo jr Console
- Step 2: Turn on the console
- Step 3: At the main Congo screen press **[Ctrl]+[Alt]+[Delete]** from the USB keyboard.
- Step 4: Select **Task Manager**
- Step 5: Select the **Processes** Tab
- Step 6: Locate **"CongoShell"** Right click on it and click on **End Task**, then click **Yes**
- Step 7: Locate **"Congo"** Right click on it and click on **End Task**, then click **Yes**

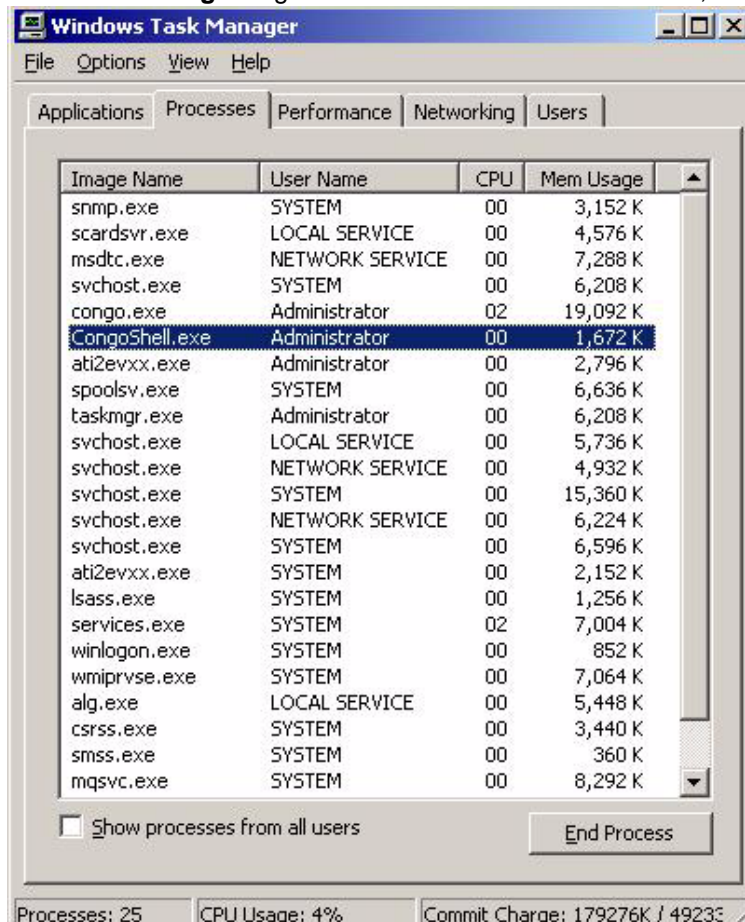


Corporate Headquarters ■ 3031 Pleasant View Road, P.O. Box 620979, Middleton, Wisconsin 53562-0979 USA ■ Tel +608 831 4116 ■ Fax +608 836 1736  
London, UK ■ Unit 26-28, Victoria Industrial Estate, Victoria Road, London W3 6UU, UK ■ Tel +44 (0)20 8896 1000 ■ Fax +44 (0)20 8896 2000  
Rome, IT ■ Via Ennio Quirino Visconti, 11, 00193 Rome, Italy ■ Tel +39 (06) 32 111 683 ■ Fax +39 (06) 32 656 990  
Holzkirchen, DE ■ Ohmstrasse 3, 83607 Holzkirchen, Germany ■ Tel +49 (80 24) 47 00-0 ■ Fax +49 (80 24) 47 00-3 00  
Hong Kong ■ Room 1801, 18/F, Tower 1 Phase 1, Enterprise Square, 9 Sheung Yuet Road, Kowloon Bay, Kowloon, Hong Kong ■ Tel +852 2799 1220 ■ Fax +852 2799 9325  
Service: (Americas) service@etcconnect.com ■ (UK) service@etcconnect.com ■ (DE) techserv-hoki@etcconnect.com ■ (Asia) service@etcconnect.com  
Web: www.etcconnect.com ■ Copyright © 2006 ETC. All Rights Reserved. ■ Product information and specifications subject to change.  
® Pending ■ Rev A ■ Released 02/2007

# ETC Service Note

## Congo™ jr MIDI, Phone and Macro Test

Step 8: Select **File -> New Task (run)**

Step 9: Type **“test2”** in the text field, then click the **“OK”** button]

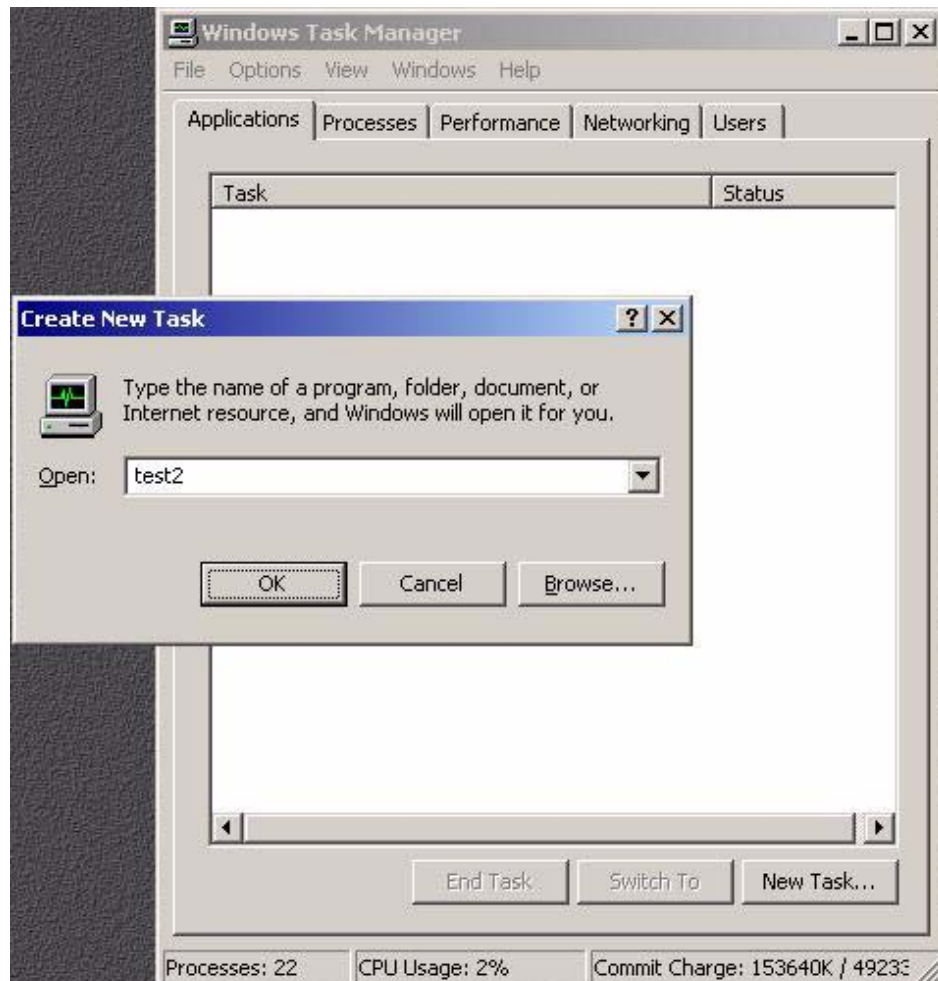

Step 10: The following window will pop up:



Step 11: Watch for the 2 LEDs to flash on the Remote Macro Test Board

Step 12: Press the 4 buttons on the LED Remote Macro Test Board (if present), look for **“ACTIVE”** on -the screen

Step 13: Look for MIDI IN messages of 32 and 33 repeating

Step 14: Press all 12 buttons on the phone individually and look for corresponding numbers on the screen

Step 15: Close the command window

Step 16: Shut the console down.