



Express 24/48 ECS

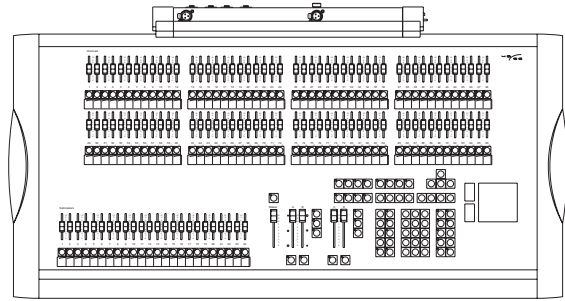

Express 48/96 ECS

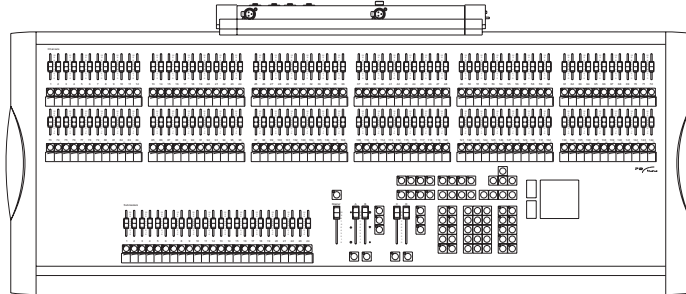

Express 72/144 ECS

SPECIFICATIONS

- APPLICATIONS**
 - College
 - Middle/High School
 - Community Theater
 - Trade Show
 - Smaller TV Studio
 - Church
- FEATURES**
 - Express style interface
 - Two scene preset (24, 48 or 72 channel faders) or single scene (48, 96 or 144 channel faders)
 - Dual playback
 - 10 pages of 24 submasters
 - Trackpad for intensity and moving light control
 - Two DMX ports
 - ETCNet2 Ethernet native
 - MIDI Timecode
 - MIDI Show Control
- ACCESSORIES**
 - Flat screen monitor
 - Remote Focus Unit (RFU)
 - Wireless Remote Focus Unit (WRFU)
 - Video Node
 - DMX Node Rack Mount
 - DMX Node Wall Mount
 - DMX Node Touring
 - DMX Node Two Port
 - Gooseneck Lamps
- SYSTEM**
 - Requires Emphasis 2D or Emphasis 3D server for operation.

(See "Emphasis System" data sheet for more details).

ORDERING INFORMATION

Express Two-Scene ECS Facepanels

Model#	Description
EMPH - EXPS24	Express 24/48 ECS Facepanel
EMPH - EXPS48	Express 48/96 ECS Facepanel
EMPH - EXPS72	Express 72/144 ECS Facepanel

Other Products in Emphasis Series

Model#	Description
EMPH - 2D-500	Emphasis 2D Server 500
EMPH - 2D-1000	Emphasis 2D Server 1000
EMPH - 2D-2500	Emphasis 2D Server 2500
EMPH - 2D-5000	Emphasis 2D Server 5000
EMPH - 3D-500	Emphasis 3D Server 500
EMPH - 3D-1000	Emphasis 3D Server 1000
EMPH - 3D-2500	Emphasis 3D Server 2500
EMPH - 3D-5000	Emphasis 3D Server 5000
EMPH - INST	Insight ECS Facepanel
EMPH - EXPN	Expression ECS Facepanel
EMPH - EXPS	Express ECS Facepanel


Express ECS Accessories

Model#	Description
DNODE	See DMX Node data sheets for more details
VNODE-R	Video Node
RFU	Remote Focus Unit
WRFU-FL	Wireless Remote Focus Unit, Full System
M219	LCD Flat Screen Display
M715	Littlelite Work Light



Express™ Two-Scene ECS Facepanel

Emphasis Series

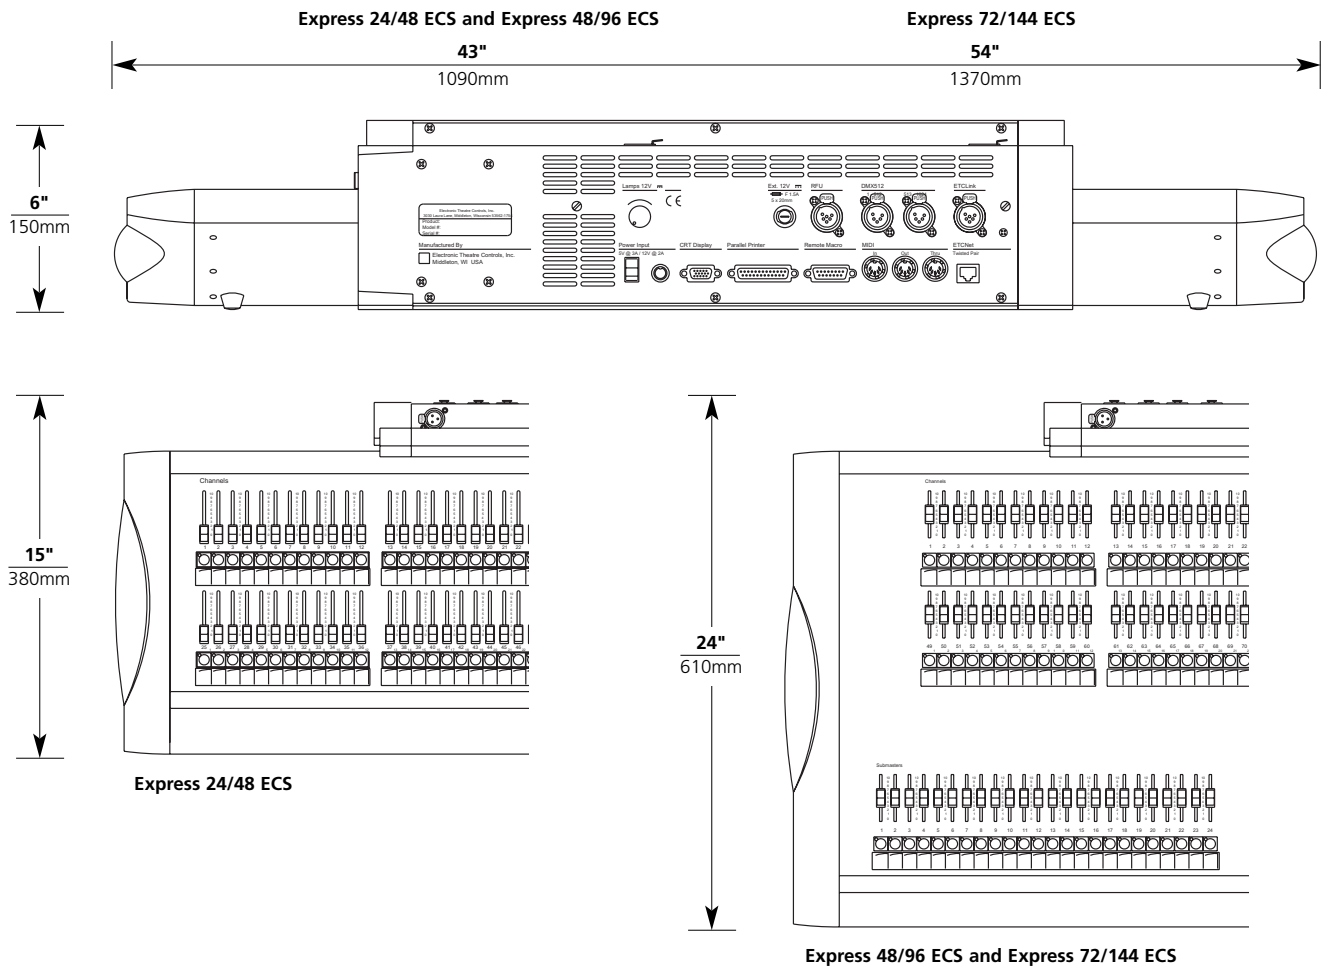

PHYSICAL

Express Two-Scene ECS FP Dimensions*

Model	Height		Width		Depth	
	inches	mm	inches	mm	inches	mm
Express 24/48 ECS	6	150	43	1090	15	380
Express 48/96 ECS	6	150	43	1090	24	610
Express 72/144 ECS	6	150	54	1370	24	610

Express ECS Accessories Dimensions*

Model	Height		Width		Depth	
	inches	mm	inches	mm	inches	mm
DMX Node – rack	1.8	45	17	432	12.5	320
DMX Node – wall mount	8	203	8	203	4.1	105
DMX Node – Two Port	2	117	4.5	114	2.75	70
Video Node	1.8	45	17	432	12.5	320
Remote Focus Unit	1.4	34	8.5	250	5.5	140

WEIGHTS

Express Two-Scene ECS Weights*

Model	Weight		Shipping Weight	
	lbs	kgs	lbs	kgs
Express 24/48 ECS	30	13.6	32	14.5
Express 48/96 ECS	35	15.8	42	19
Express 72/144 ECS	40	18.1	55	25

Express ECS Accessories Weights*

Model	Weight		Shipping Weight	
	lbs	kgs	lbs	kgs
DMX Node – rack	8	3.6	18	8.2
DMX Node – wall mount	2.2	1	10	4.5
DMX Node – Two Port	2	1	4.5	2
Video Node	8	3.6	18	8.2
Remote Focus Unit	3	1.4	5	2.3

* Weights and dimensions typical



Corporate Headquarters ■ 3031 Pleasant View Rd, PO Box 620979, Middleton WI 53562 0979 USA ■ Tel +1 608 831 4116 ■ Fax +1 608 836 1736
London, UK ■ Unit 26-28, Victoria Industrial Estate, Victoria Road, London W3 6UU, UK ■ Tel +44 (0)20 8896 1000 ■ Fax +44 (0)20 8896 2000
Rome, IT ■ Via Ennio Quirino Visconti, 11, 00193 Rome, Italy ■ Tel +39 (06) 32 111 683 ■ Fax +39 (06) 32 656 990
Holzkirchen, DE ■ Ohmstrasse 3, 83607 Holzkirchen, Germany ■ Tel +49 (80 24) 47 00-0 ■ Fax +49 (80 24) 47 00-3 00
Hong Kong ■ Room 605-606, Tower III Enterprise Square, 9 Sheung Yuet Road, Kowloon Bay, Kowloon, Hong Kong ■ Tel +852 2799 1220 ■ Fax +852 2799 9325
Web ■ www.etcconnect.com ■ Copyright © 2006 ETC. All Rights Reserved. All product information and specifications subject to change. 4200L1009 Rev. C Printed in USA 07/06