
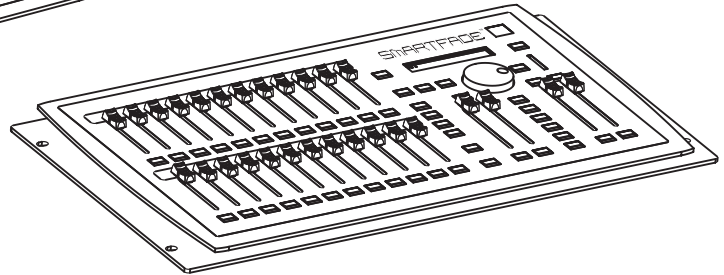


SmartFade Console Series

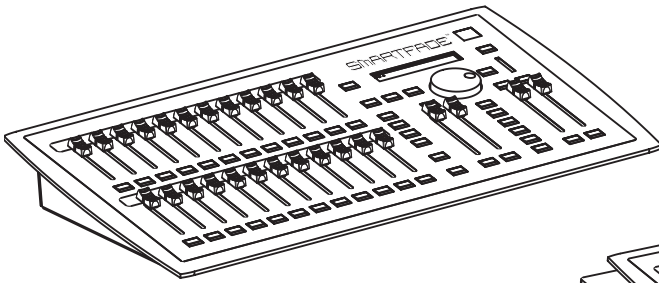

GENERAL INFORMATION

SmartFade = Smart Control. A part of our Smart Solutions product suite.

SmartFade offers a great feature range including hands-on manual control, memory driven operation, and an impressive array of features for systems work. SmartFade is perfect for any venue from a small touring show to an auditorium control console to a stage managers remote console.

- APPLICATIONS**
- Touring productions
 - Middle/High School Auditoriums
 - College
 - Community Theatre
 - Small TV studio
 - Trade Show
 - Corporate

- FEATURES**
- Preset or Memory style operation
 - 12-Channel Two Preset Mode with timed fades
 - 48-Channel Normal Mode with 288 Memories
 - Fully programmable 99 step cue stack
 - 24-Step Sequences (chases) (48 available)
 - Tap tempo mode for sequence timing
 - Magic function for random output
 - 10 Snapshot memories for temporary storage
 - Undo function
 - Master fader and Blackout button
 - Bumps master fader
 - Solo or pile-on mode for bump buttons
 - DMX Backup Mode – 24 Memories x 512 Channels
 - LCD display for configuration and preview
 - Multiple consoles can be linked via MIDI to increase channel count
 - Available in free-standing or 19" rack mount configurations
 - DMX512 Output (1 universe of 512 channels)
 - DMX512 Input (1 universe of 512 channels)
 - MIDI in/out *
 - USB interface to PC for software upgrades

*MIDI support not available in initial software release. Contact ETC for availability.

ORDERING INFORMATION

SmartFade

Part No	Description
7219A1001-UK	SmartFade 1248 Console w. UK 13A psu
7219A1001-EU	SmartFade 1248 Console w. Europlug psu

SmartFade Accessories

Part No	Description
7219K1001	19" Rack Mount Bracket
A128	SD RAM Card

Other Consoles in the SmartFade Family

Part No	Description
7219A1096-UK	SmartFade 1296 Console w. UK 13A psu
7219A1096-EU	SmartFade 1296 Console w. Europlug psu
7219A1002-UK	SmartFade 2496 Console w. UK 13A psu
7219A1002-EU	SmartFade 2496 Console w. Europlug psu




SPECIFICATIONS

- MECHANICAL** 12 channels in 2 scene mode
 48 channels in Normal mode
 512 DMX Outputs
 512 DMX Inputs
 288 memories in Normal mode
 Cross fader pair for cue stacks or sequences
 Manual, Timed or Rate-Override playback in all modes
 99 step cue stack
 4 Sequence faders x 12 pages
 24 step sequences
 SD Card Slot for show backup
 LCD Menu for configuration and preview
 English, French, German and Spanish language support
- PLAYBACK CONTROLS**
- Channel Faders**
 2 preset banks x 12 channels in Two Preset mode
 24 channel faders x 2 banks in Normal mode for access to all 48 channels
 Individual bump buttons on all channel faders with solo or pile-on operation
- Memory Faders**
 24 memory faders x 12 pages in Normal mode for access to all 288 memories
 Individual bump buttons on all memory faders with solo or pile-on operation
- Backup Faders**
 24 memory faders in DMX Backup mode for access to DMX backup looks
 Each memory can store 512 channels
- Crossfaders**
 Crossfader pair for manual, timed or rate-override playback in all modes with Go, Pause, Rate and Clear buttons
- Master fader and Blackout button**
- Bumps fader**
- Independent channels (IND1 and IND2)**
- PROGRAMMING TOOLS**
- Snapshot storage**
 Ten locations for temporary storage of memories
- Magic**
 Magic function creates random levels and random chases.
- Editing**
 Memories, cue stack and sequences can be edited
 Cue stack and sequence steps can be inserted, moved and deleted individually
- INTERFACES**
- DMX512 Output
 DMX 512 Input
 USB
 MIDI in/out *


*MIDI support not available in initial software release. Contact ETC for availability.

SYSTEM APPLICATIONS


DMX Console Applications

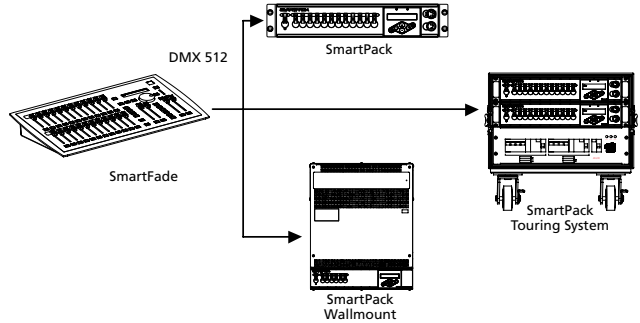

Other System Applications

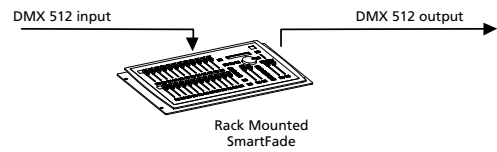

DMX Backup Mode Application

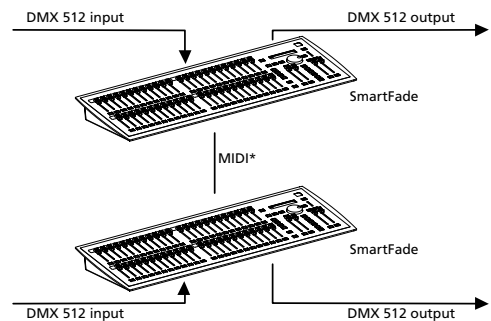

PHYSICAL

SmartFade Dimensions and Weight

Model	Height	Width	Depth	Weight
SmartFade 1248	64mm	457mm	254mm	3kg

Available from:



Corporate Headquarters ■ 3031 Pleasant View Rd, PO Box 620979, Middleton WI 53562 0979 USA ■ Tel +1 608 831 4116 ■ Fax +1 608 836 1736

London, UK ■ Unit 5, Victoria Industrial Estate, Victoria Road, London W3 6UU, UK ■ Tel +44 (0)20 8896 1000 ■ Fax +44 (0)20 8896 2000

Rome, IT ■ Via Ennio Quirino Visconti, 11, 00193 Rome, Italy ■ Tel +39 (06) 32 111 683 ■ Fax +39 (06) 32 656 990

Holzkirchen, DE ■ Ohmstrasse 3, 83607 Holzkirchen, Germany ■ Tel +49 (80 24) 47 00-0 ■ Fax +49 (80 24) 47 00-3 00

Hong Kong ■ Room 605-606, Tower III Enterprise Square, 9 Sheung Yuet Road, Kowloon Bay, Kowloon, Hong Kong ■ Tel +852 2799 1220 ■ Fax +852 2799 9325

Web www.etcconnect.com ■ **Email** (Americas) mail@etcconnect.com ■ (UK) mail@etc europe.com ■ (DE) info@ttlicht.com ■ (Asia) mail@etcasia.com

Copyright©2005 ETC. All Rights Reserved. All product information and specifications subject to change. 7219L1002-GB Rev C 03/05