

Insulated handle installation



The insulated handle is best installed when the lamp housing is removed to prevent the drill's metal shavings from falling into the lamp reflector.

Removing the lamp housing

1. Disconnect the fixture from its power source.
2. Loosen the knurled knob on the back of the lamp housing, see Figure 1.
3. Carefully pull the lamp housing out. (If an HPL lamp is installed, remove it.)

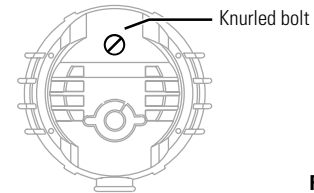


Figure 1

Drilling the screw holes

The lamp housing has four existing holes that you will deepen slightly to accommodate the insulated handle's mounting screws, see Figure 2.

Using an 1/8 inch bit, drill through the lamp housing's holes to a depth of 1/2 inch.

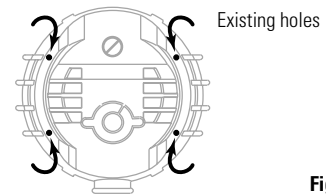


Figure 2

WARNING! Drilling more than a 1/2 inch may damage lamp housing wiring.

Mounting the handle

1. Place the handle on the lamp housing.
2. Insert the screws and secure the handle to the lamp housing, see Figure 3.
3. Replace the lamp housing to the fixture by tightening the knurled bolt.


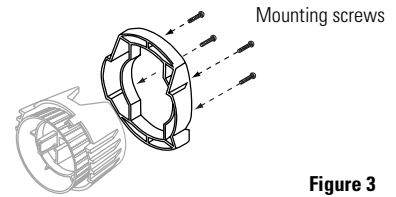


Figure 3



Electronic Theatre Controls

North America 3030 Laura Lane • Middleton, Wisconsin 53562 • USA • Tel: (+1) 608 831 4116 • Fax: (+1) 608 836 1736

Europe 5 Victoria Industrial Estate • Victoria Road • London W3 6UU • Tel: (+44) 181 896 1000 • Fax: (+44) 181 896 2000

Asia Room 605-606 • Tower III • Enterprise Square • 9 Sheung Yue Road • Kowloon Bay • Hong Kong • Tel: (+852) 2799 1220 • Fax: (+852) 2799 9325

World Wide Web: <http://www.etcconnect.com> • Email: mail@etcconnect.com

Specifications subject to change. Source Four is protected by US patent numbers 5,345,371, 5,446,637, 5,268,613 and 5,544,029; Japanese Patent 2,501,722, US and International Patents Pending. 7060M1013.
Copyright 1998
Revised 10/98.