
Express/Expression Series

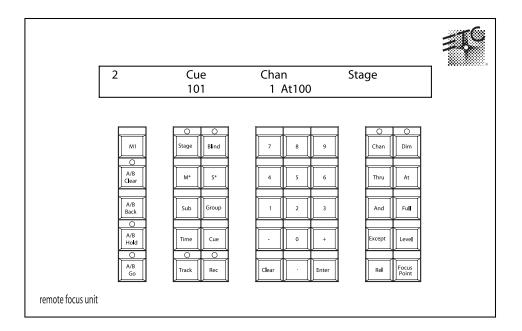

GENERAL INFORMATION

The Expression Remote Focus Unit (RFU) provides a powerful solution for remote control. Compatible with the ETC Express, Expression and Insight consoles and LPCs, as well as the Emphasis Control System, this hand-held unit provides access to frequently used commands for dimmer and channel checks as well as record, playback and macro functions. The built-in LCD provides information including current cue status and command string.

APPLICATIONS Theatre

School & College

Studio Touring Church

Themed Retail & Restaurant

FEATURES Commonly used commands for focus and

basic record & playback

Macro access for any other console commands

Backlit LCD displays current screen, cue

status and command string

LED on critical-function buttons mimic

console button LED behavior

On/Off switch 50' integral cable

Interface for Lighting Playback Controller

(LPC) applications

Interface at ETCNet2 Video & DMX Nodes

ACCESSORIES ECPB wall plates available (female connection)

Console to wall (M-M) cables available Extension (M-F) cables available

ORDERING INFORMATION

Expression Remote Focus Unit

Part#	Model#	Description	
4031A1003	EXPN-RFU	Remote Focus Unit for Expression	

Product Accessories

Part#	Description
1094A1040	ECPB: RFU plug in station
1094A1050	ECPB: RFU/NET plug in station
1094A1060	ECPB: DMX1 IN/RFU plug in station
1094A1065	ECPB: DMX2 OUT/RFU plug in station
1094A1075	ECPB: DMX1 IN/RFU/LINK plug in station
1094A1080	ECPB: DMX1 IN/RFU/LINK/NET plug in station
1094A1085	ECPB: DMX1 IN/RFU/LINK/UINSON plug in station
1094A1090	ECPB: DMX1 IN/RFU/LINK/NET/UNI plug in station
1094A1095	ECPB: DMX1 IN/DMX2 IN/RFU/LINK plug in station
1085A1040	10' RFU/LINK M-M extension cable
1085A1052	50' RFU/LINK M-M extension cable
1085A1010	100' RFU/LINK M-M extension cable
1085A1008	25' RFU/LINK M-M extension cable
1085A1013	50' RFU/LINK M-M extension cable
1085A1009	100' RFU/LINK M-M extension cable



Expression® Remote Focus Unit

Express/Expression Series

SPECIFICATIONS

DISPLAY 40 character x 2 line LCD

CONNECTIONS Integral 50' 6-pin XLR cable to RFU port


1000' maximum **CABLE LENGTH POWER** 7-12VDC, 25-30mA


On/Off switch

CONROLS 15 key numeric keypad

> 10 channel level function keys 10 record, command and macro keys

5 playback keys





DIMENSIONS

Product Dimensions


Model	Height		Width		Depth		Cable Length	
	inches	mm	inches	mm	inches	mm	feet	metre
EXPN-RFU	1.5	38	8.5	216	5.5	138	50	15.2
RFU Ship Dimensions	6	152	18	457	14	356	n/a	n/a

WEIGHTS

Product Weights

Model	We	ight	Shipping Weight		
	lbs	kgs	lbs	kgs	
OBSN-RFU unit only	1.3	.58	n/a	n/a	
OBSN-RFU with cable	3.1	1.4	8	3.6	

TYPICAL RISER DIAGRAM



Express 125

